

# 2°C~8°C Pharmacy/Lab Refrigerator

*Intelligent Control & Constant Temperature  
Multiple Alarms Bring More Security*



## YC-56L

### ➤ Accurate Control System

High accuracy temperature controller with high sensitivity sensors, keep the temperature within 2~8°C, Display accuracy at 0.1°C.

### 🛡️ Refrigeration System

With renowned brand compressor and condenser, better cool performance;  
HCFC-FREE refrigerant ensure environmental protection & safety;  
Forced air cooling, auto-defrost, temperature uniformity within 3°C.

### 👤 Human-oriented

Front opening lockable door with full height handle;  
Perfect audible and visual alarms: high and low temperature alarm, sensor failure alarm, power failure alarm, door ajar alarm;  
Cabinet made of high quality steel, inner side with Aluminum plate with spraying material, durable and easy to clean;  
Fitted with 2casters + (2 leveling feet) ;  
Standard with build-in USB datalogger, remote alarm contact and RS485 interface for monitor system.





### Intelligent Temperature Control

Electronic temperature controller; The digital average temperature display facilitates observation and monitoring of temperature inside the cabinet, and the precision of temperature display accuracy at 0.1°C.



### Security System

- The well-developed audible & visual alarm system: high/low temperature alarm, low battery alarm, sensor failure alarm, power failure alarm, high ambient temperature alarm, door ajar alarm, recorder failure etc.
- The turn-on delay and stopping interval protection function can ensure reliability in running;
- The door is equipped with a lock, preventing it from unauthorised users.



### Refrigeration System

Equipped with a compressor supplied by an international famous brand, high-efficiency air-cooled condenser and finned evaporator, ensuring fast refrigeration.



### Data Storage

- Equipped with a USB export interface, which can be used for exporting data in PDF;
- When a U-disk is connected, temperature data can be stored continuously and automatically (data can be stored for 100,000 sets of data).



### Lighting System

Equipped with lighting system with LED lights, ensuring high visibility inside the cabinet.




### Human-oriented

- Equipped with high-quality shelves made from PVC-coated steel wire, which are easy to clean;
- Equipped with testing port, bringing convenience to users in testing temperature inside the cabinet.


## Scope of Application

Suitable for storage of biological products, vaccines, drugs, reagents, etc. Suitable for use in pharmacies, pharmaceutical factories, hospitals, centers for disease prevention & control, clinics, etc.

## Performance Data / Cooling Curve

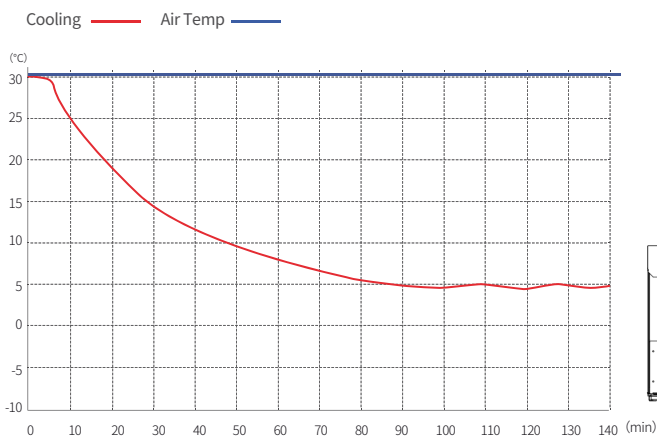

## External Dimensions

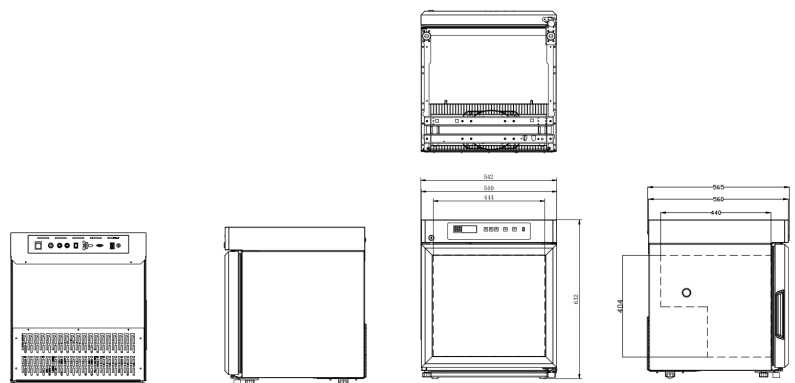

## Specification Chart

| 2~8°C Pharmacy Refrigerator          |   |
|--------------------------------------|---|
| Model                                | YC-56L  |
| Cabinet Type                         | Upright   |
| Capacity(L)                          | 56  |
| Internal Size(W*D*H)mm               | 444*440*404   |
| External Size(W*D*H)mm               | 542*565*632   |
| Package Size(W*D*H)mm                | 575*617*682   |
| NW/GW(Kgs)                           | 35/41   |
| Performance                          |   |
| Temperature Range                    | 2~8°C   |
| Ambient Temperature                  | 16-32°C   |
| Cooling Performance                  | 5°C   |
| Climate Class                        | N   |
| Controller                           | Microprocessor  |
| Display                              | Digital display   |
| Refrigeration                        |   |
| Compressor                           | 1pc   |
| Cooling Method                       | Forced air cooling  |
| Defrost Mode                         | Automatic   |
| Refrigerant                          | R600a   |
| Insulation Thickness(mm)             | L/R:48,B:50   |
| Construction                         |   |
| External Material                    | PCM   |
| Inner Material                       | Aluminum plate with spraying/Stainless steel                                      |
| Shelves                              | 2(coated steel wired shelf)   |
| Door Lock with Key                   | Yes   |
| Lighting                             | LED   |
| Access Port                          | 1pc. Ø 25 mm  |
| Casters                              | 2+ (2 leveling feet)  |
| Data Logging/Interval/Recording Time | USB/Record every 10 minutes / 2 years   |
| Door with Heater                     | Yes   |
| Backup battery                       | Yes   |
| Alarm                                |   |
| Temperature                          | High/Low temperature,High ambient temperature                                     |
| Electrical                           | Power failure , Low battery   |
| System                               | Sensor failure,Door ajar , Built-in USB datalogger failure, Communication failure |
| Electrical                           |   |
| Power Supply(V/HZ)                   | 220/60  |
| Accessories                          |   |
| Standard                             | RS485,Remote alarm contact  |

\*The model, parameters and performance specified in this brochure may be changed without prior notice because of product upgrading.

\*There may be differences between the product images shown in this brochure and the actual products. When you are buying any product, please check the actual product.